
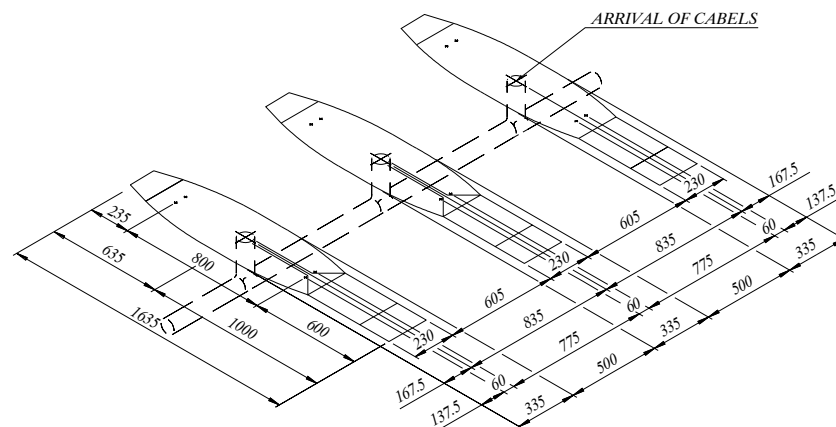
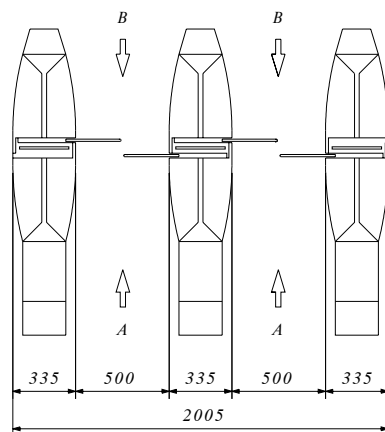


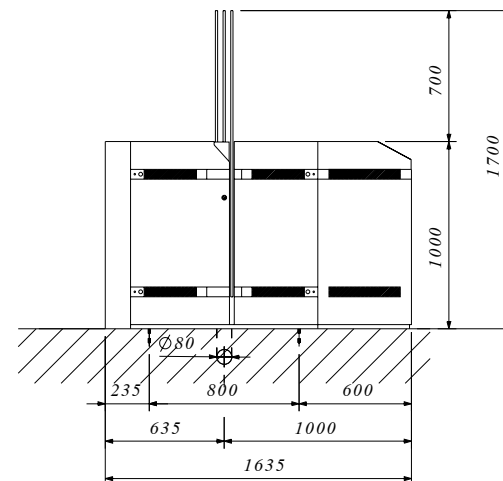

- SEPARATE POWER SUPPLY FOR EACH RIGHT-HAND GATE AND INTERMEDIATE GATES IN 230V $\approx \frac{1}{2}$ IN 3G2.5
- CONNECTION WITH EARTH WIRE 2.5 FROM LEFT-HAND GATE TO INTERMEDIATE GATE
- CONNECTION BETWEEN EACH UNIT IN 12 PARS 0.6 TYPE TPVF
- REMOTE COMMAND BETWEEN DESK AND RIGHT-HAND GATE AND INTERMEDIATE GATE IN 12 PARS 0.6 TYPE TPVF

- LIAISON CABLE BETWEEN EACH UNIT IN 4G1.5 TYPE LIYCY (MOTOR POWER SUPPLY)

- IN ANY CASE 3 M TAIL CABLE END MUST BE FORESEEN

A	"AJOUT D'UNE VUE ISOMETRIQUE POUR FORAGE ET ALIM."	CF	23/07/02
INDICE : AANWIJZING :	MODIFICATIONS : WIJZIGINGEN :	PAR : DOOR :	DATE : DATUM :
DESIGNATION : BESTEMMING :	"HIGH SECURITY" AUTOMATIC GATE TYPE PNG381		
CLIENT : KLANT :			
<i>De plan est notre propriété et ne peut être cédé à des tiers ni être recopié sans autorisation écrite de Automatic Systems.</i> <i>Dit plan blijft onze eigendom en mag niet voorgegeeld aan derden noch worden gekopieerd zonder schriftelijke toelating van Automatic Systems.</i>			
 automatic systems Avenue Mercator, 5 - B-1300 Wavre www.automaticsystems-group.com	DESSINE : GETEKEND :	DATE : DATUM :	N° DOSSIER : N° DOSSIER :
	SL	15/12/2002	-----
	VERIFIE : NAGEZIEEN :	ECHELLE : SCHAAL :	PLAN N° : PLAN N° :
	SL	1/20	CH3527-gb